



Central States Sentry™ Model 7500

Smooth performing
wind rated sheet door


www.centralstatesco.com



Central States Sentry™ Model 7500 Roll Up Door

Our 26 gauge curtain showcases the industry's most common standard profile, ensuring widespread compatibility. The dead axle design, meticulously crafted for an extended lifespan, and the user-friendly tension device enables quick and easy adjustments.

Suitable for wind rated applications, our doors boast a factory-installed stainless-steel lock and a versatile hole pattern, seamlessly integrating with various industry Bluetooth lock mechanisms.

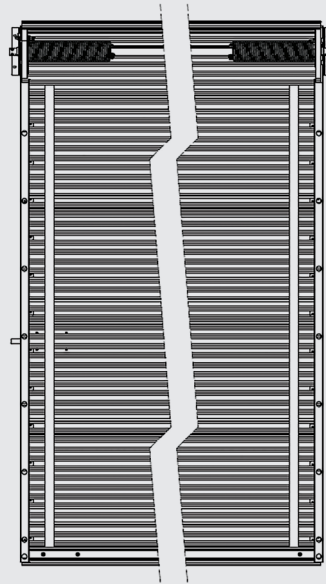

Sizing Requirements:

Door defined by opening size up to 10' wide x 10' tall

Headroom Clearance Required:

	Vertical	Horizontal
Up Thru 8'0" tall	16"	18"
Thru 10'0" tall	18"	20"

Sideroom Clearance Required:

Guide	2"
Each Bracket Leg	3¼"
End of Axle	3½"

Door Width Design Pressure

3'-0"	+40.0/-51.0	*7'-0"	+33.2/-36.8
3'-6"	+35.2/-44.8	*8'-0"	+29.0/-32.3
4'-0"	+31.7/-40.1	*8'-8"	+26.8/-29.7
5'-0"	+26.6/-31.1	*9'-0"	+25.0/-27.0
6'-0"	+23.3/-29.2	*10'-0"	+19.4/-22.7



Specifications:

Curtain

- 26 gauge ASTM A653 SS80 class steel curtain available in a variety of colors.
- Factory-applied 4-bolt stainless steel latch.
- 1" wide felt strip minimizes steel on steel touchpoints.
- Non-corrosive aluminum bottom bar features industry-standard astragal.

Windlocks

- ASTM A653 12 gauge wind clips spaced evenly along curtain edge as required.

Axle Spring Assembly

- ASTM 228 high-carbon pre-galvanized steel alloy springs.
- Radial ball bearing drums for smooth operation.
- 11 gauge steel tube featuring a 3/8" winding bar slot to work with the factory supplied tensioner for easy adjustments across dead axle design.

Guides

- 18 gauge galvanized universal mounted guides feature polyethylene strips to reduce friction and travel noise.
- Pre-punched holes for door jamb mount, latch, brackets, and stops.

Hardware

- 12 gauge factory assembled slotted brackets snap into guides, reducing installation time.
- Door stops prevent overtravel by directly contacting the bottom bar angle and door catch.
- ADA accessories for manual compatibility are available.

Warranty

- Limited 3-year product warranty.
- Limited 40-year paint warranty.